

8

7

6

5

4

3

2



1

VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF VICOR CORP.


REVISIONS

REV	DESCRIPTION	DATE	APPROVED
A	RELEASE PER ECO #01832	11/07/89	MLS
B	REVISED PER E020468 DPK	10/10/02	GCK
3	REVISED PER ECO Request E080622 REJH	28/03/02	EF
4	REVISED PER E100134 JSR	2/1/10	MH
5	REVISED PER E100698A KUK	5/19/10	JG

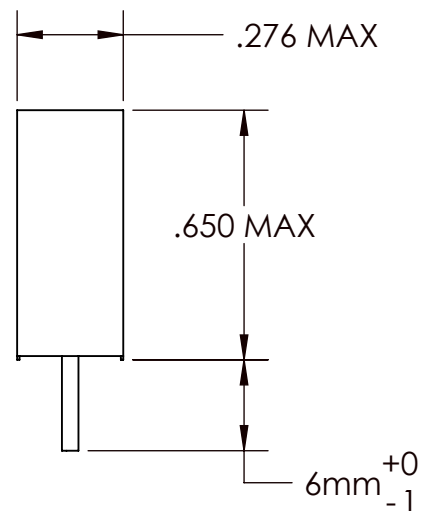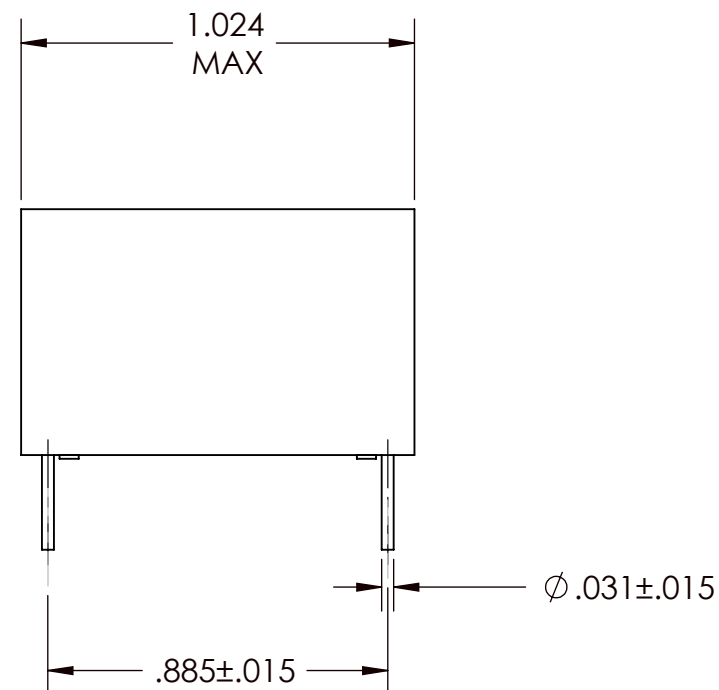

ELECTRICAL CHARACTERISTICS

RATED VOLTAGE	310 VAC, 50/60HZ
CAPACITANCE	.15uF, ±10%
CLASS	X2.
DISSIPATION FACTOR	1% MEASURED AT 1 kHz.
MAX. PULSE RATE TIME	Du/Dt ACC.TO VDE 5651 100 V /uSEC.

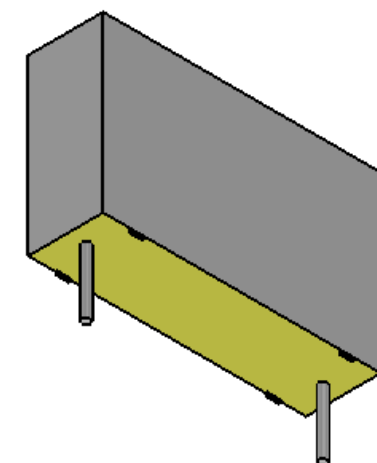

NOTES:

- 1: CAPACITORS - DIELECTRIC, POLYESTER-FILM.
- 2: INTERNATIONAL SAFETY AGENCY APPROVALS AND MARKINGS FROM: VDE, SEV, DEMKO, SEMKO, NEMKO, SETI, UL, IMQ, OVE.
3. RoHS COMPLIANT, LEAD FREE PER CST-0001 LATEST REVISION.
4. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES

DRAWN	DATE			SWD	
J. CLEMENZI	10/89				
MATERIAL	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCH [MM] TOLERANCES ARE: DECIMALS      ANGLES X.XX [X.X] = ±0.01 [0.25]      ±1° X.XXX [X.XX] = ±0.005 [0.127]		<b>AC-CAPACITOR</b> <b>0.15uF, 310VAC, (X2)</b>		
FINISH	THIRD ANGLE PROJECTION	SIZE			CAGE CODE
		<b>B</b>	<b>67131</b>	<b>03269</b>	<b>5</b>
		SCALE 2 : 1	SHEET 1 OF 1		

8

7

6

5

4

3

2

1