


VICOR CONFIDENTIAL



THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVED
1	RELEASED PER E0430434	DPK 09/17/04	FN

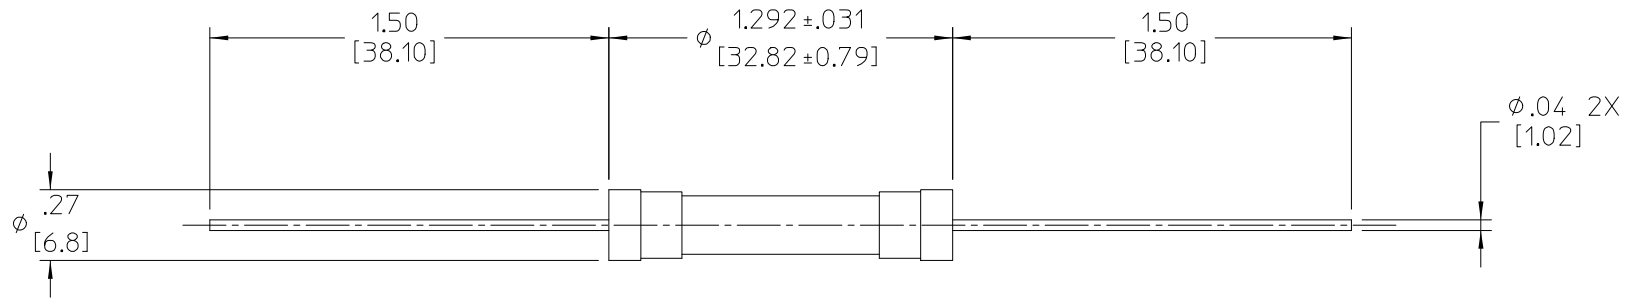

NOTES:

1. MATERIAL: CERAMIC TUBE.
2. ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING = 30A
 - RATED VOLTAGE = 125VAC (MAX)
 - INTERRUPT RATING = 1000A
 - (MEASURED @ 85%-95% POWER FACTOR ON AC, AT A TIME CONSTANT DESCRIBED IN UL 198L).
3. AGENCY APPROVALS: UL RECOGNITION, GUIDE JDYXZ, FILE E19180.
4. FOR ADDITIONAL SPECS, DIMENSIONS & TOLERANCES CONTACT VENDOR & CHECK DATA SHEET.

DRAWN BY <i>D.P. KELLY</i>		DATE <i>08/04</i>			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN IN/(MM)-TOLERANCES ARE: DECIMALS ANGLES .XX = ± .01 [0.250] ± 1° .XXX = ± .005 [0.127]					
THIRD ANGLE PROJECTION 		SIZE B	FSCM NO. 67131	DWG NO. 23196	REV 1
DO NOT SCALE DRAWING		SCALE	2/1	SHEET 1 OF 1	